


**RE: LAYOUT OF RAIL ASSEMBLIES FOR THE FITMENT OF THE T-GLIDE® FILING SYSTEM**

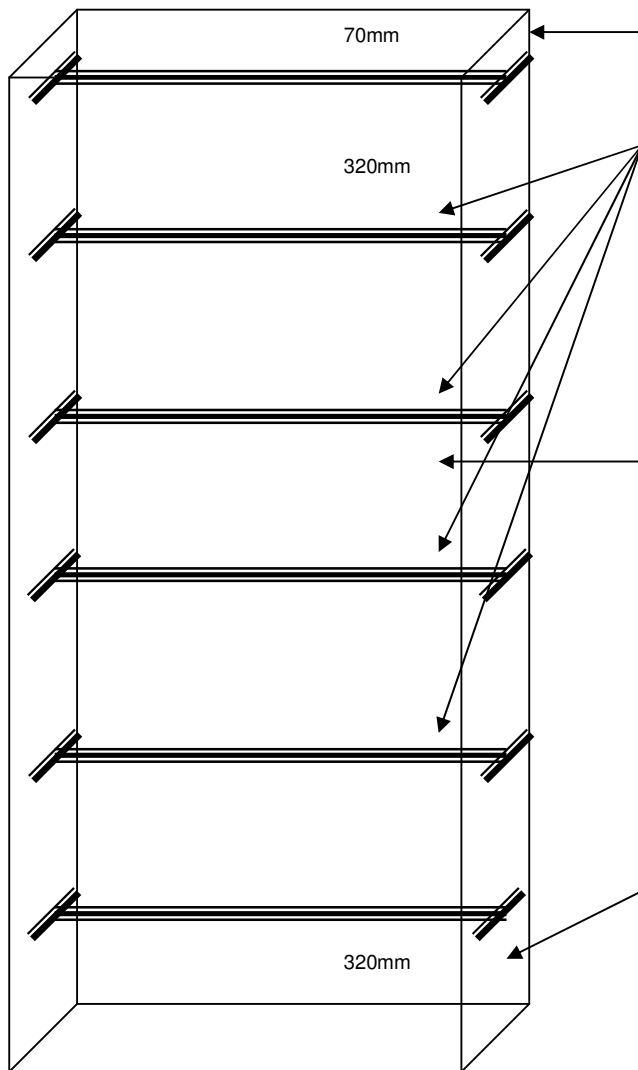

Top Rail – **70mm** from top cabinet to top of Rail (not the Bracket)

Intermediate Rails – **320mm** From Top of above Rail to Top of next fitment.

Reference Shelf – fitted at approx. waist height (subject to housing Heights). Must have **320mm** clear from top of rail to surface of shelf. Next rail under pull-out must be **70mm** under, as Top rail.

Last/Bottom Rail – **320mm** Clear From Top of Rail to bottom surface of cabinet.

Minimum Cabinet Depth of **400mm**. Rail to be positioned centre of the side wall.

Rail Cross Section

